

BORNE DE RECHARGE VEHICULE ELECTRIQUE- 7 Kw **MONOPHASEE**



Application



Specifications



Aurora 7/11			
General	Model Name	Aurora 7	Aurora 11
Power Input	Input Rating	230Vac±10%, 45-65Hz, single-phase	400Vac±10%, 45-65Hz, three-phase
	Number of Phase/Wire	L+N+PE	L1+L2+L3+N+PE
	Internal RCD	DC 6mA + type A AC 30mA	DC 6mA + type A AC 30mA
Power Output	Output Power	7kW max.	11kW max.
	Output Current	32A max.	16A max.
	Charging Interface	IEC 62196-2 Type 2 socket	
User Interface & Control	Status Indicators	RGB LED	
	Buttons and Switch	Emergency stop button	
	Card Reader	ISO/IEC 14443 A/B Mifare RFID reader	
Communication	Network Interface	4G, Ethernet (optional), Wi-Fi (optional), Bluetooth (optional)	
	Charging Protocol	OCPP1.6J	
Environmental	Operating Temperature	-30°C - 50°C	
	Storage Temperature	-40°C - 70°C	
	Humidity	5% - 95% no condensation	
	Altitude	≤ 2000 m	
Mechanical	Ingress Protection	IP54	
	Enclosure Protection	IK10	
	Cooling	Natural cooling	
	Dimension (WxHxD)	282*409*148 mm	282*409*148 mm
	Weight	approx. 4.5kg	approx. 5.6kg
	Connection	Case B	
	Installation	Wall-mounted, Column-mounted	
Regulation	Certificate / Compliance	CE, TR25	

Photos Non Contractuelles

COLONNE SUPPORT POUR BORNE DE RECHARGE

DIMENSIONS: 1.22 X 0.15 X 0.05—BASE: 0.38 X 0.21 M


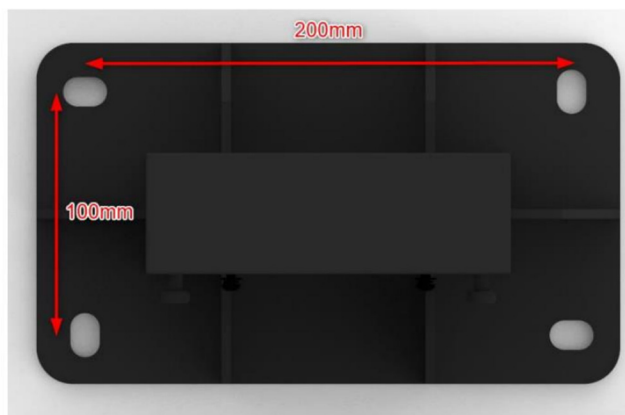


Figure A-14 Schéma de fixation du siège de colonne



LA COLONNE GL-2107 EST PREVUE POUR ACCEPTER DEUX CHARGEURS GL-2007(DOS A DOS)

Photos Non Contractuelles

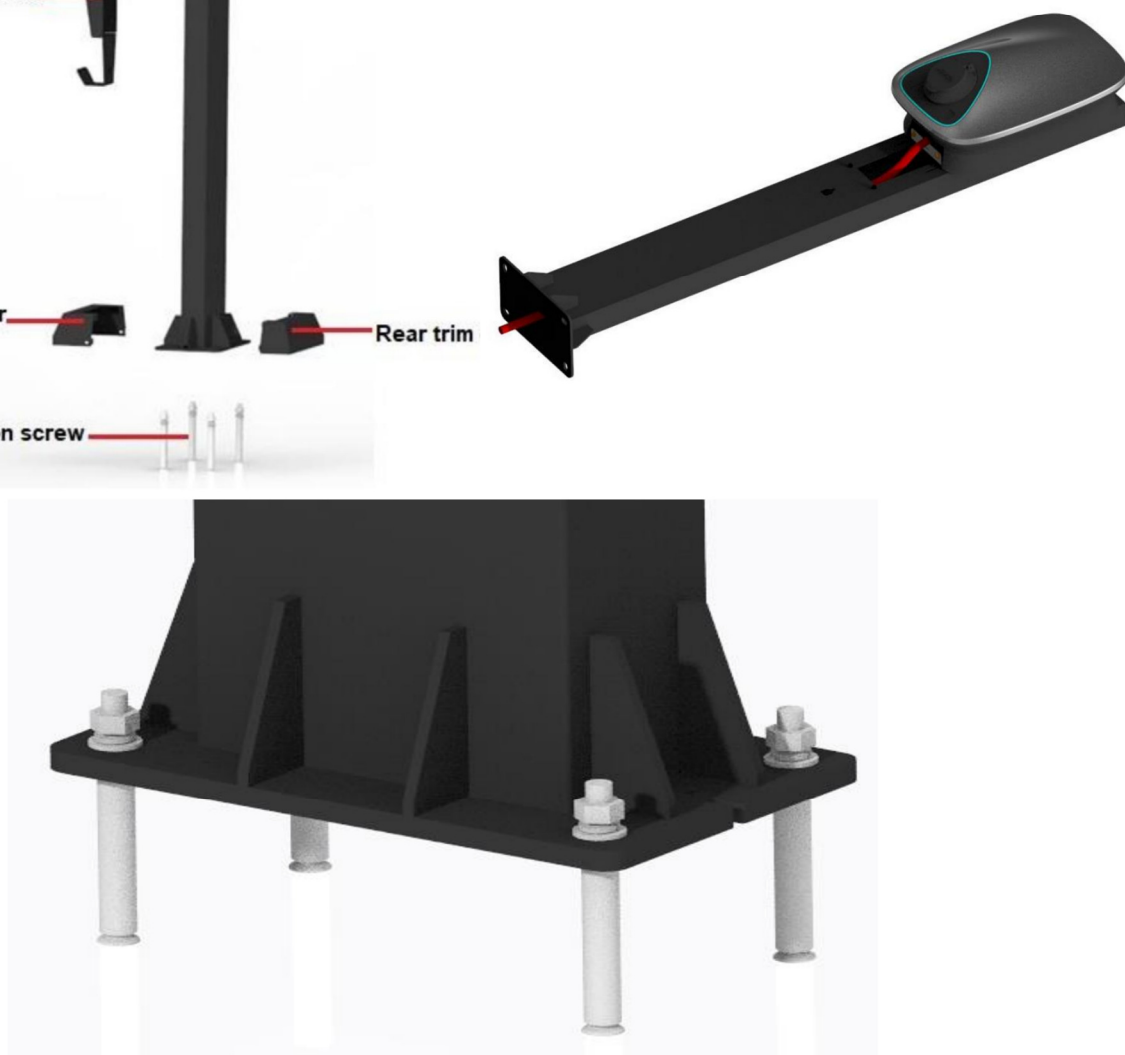